


STRAIGHT

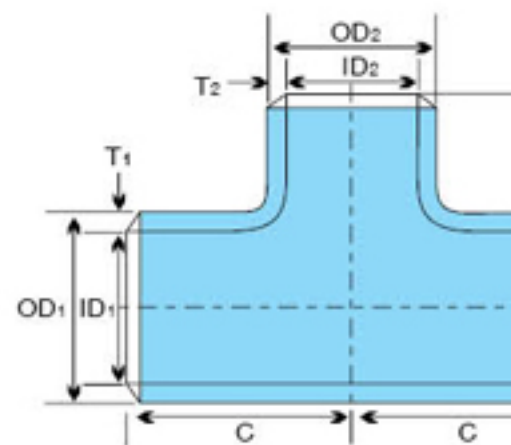

REDUCING

KS B1541 / KS B1543, JIS B2312 / JIS B2313

Nominal Pipe Size	Outside Diameter		Wall Thickness T					
			Sch 5s		Sch 10s		Sch 20s	
	OD ₁	OD ₂	T ₁	T ₂	T ₁	T ₂	T ₁	T ₂
15	21.7	21.7	1.65	1.65	2.1	2.1	2.5	2.5
20	27.2	27.2	1.65	1.65	2.1	2.1	2.5	2.5
25	34.0	34.0	1.65	1.65	2.8	2.8	3.0	3.0
32	42.7	42.7	1.65	1.65	2.8	2.8	3.0	3.0
32 x 32 x 25	42.7	34.0	1.65	1.65	2.8	2.8	3.0	3.0
40	48.6	48.6	1.65	1.65	2.8	2.8	3.0	3.0
40 x 40 x 32	48.6	42.7	1.65	1.65	2.8	2.8	3.0	3.0
40 x 40 x 25	48.6	36.0	1.65	1.65	2.8	2.8	3.0	3.0
50	60.5	60.5	1.65	1.65	2.8	2.8	3.5	3.5
50 x 50 x 40	60.5	48.6	1.65	1.65	2.8	2.8	3.5	3.5
50 x 50 x 32	60.5	42.7	1.65	1.65	2.8	2.8	3.5	3.5
65	76.3	76.3	2.10	2.10	3.0	3.0	3.5	3.5
65 x 65 x 50	76.3	60.5	2.10	1.65	3.0	2.8	3.5	3.5
65 x 65 x 40	76.3	48.6	2.10	1.65	3.0	2.8	3.5	3.5
80	89.1	89.1	2.10	2.10	3.0	3.0	4.0	4.0
80 x 80 x 65	89.1	76.3	2.10	2.10	3.0	3.0	4.0	4.0
80 x 80 x 50	89.1	60.5	2.10	1.65	3.0	2.8	4.0	4.0
90	101.6	101.6	2.10	2.10	3.0	3.0	4.0	4.0
90 x 90 x 80	101.6	89.1	2.10	2.10	3.0	3.0	4.0	4.0
90 x 90 x 65	101.6	76.3	2.10	2.10	3.0	3.0	4.0	4.0
100	114.3	114.3	2.10	2.10	3.0	3.0	4.0	4.0
100 x 100 x 90	114.3	101.6	2.10	2.10	3.0	3.0	4.0	4.0
100 x 100 x 80	114.3	89.1	2.10	2.10	3.0	3.0	4.0	4.0
100 x 100 x 65	114.3	76.3	2.10	2.10	3.0	3.0	4.0	4.0
125	139.8	139.8	2.80	2.80	3.4	3.4	5.0	5.0
125 x 125 x 100	139.8	114.3	2.80	2.10	3.4	3.0	5.0	4.0
125 x 125 x 90	139.8	101.6	2.80	2.10	3.4	3.0	5.0	4.0

1□□|□□2